
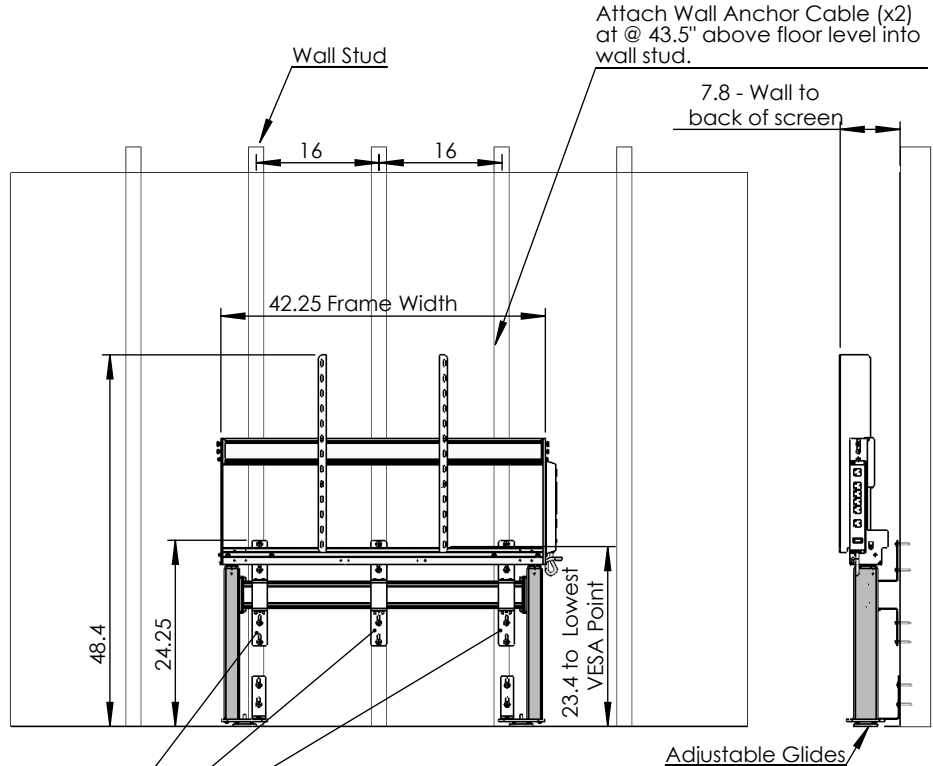


PRO-LIFT FFM-600

Recommended Wall Attachment

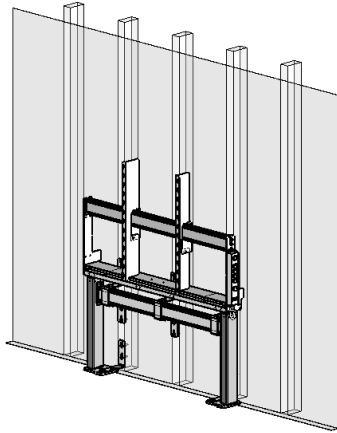

Must be attached to a minimum of 2 wall studs.
(Brackets provided for 3 wall studs)

Brackets may be adjusted along the length of
the rail to match wall studs.
(up to 16 fastening points on 3 wall studs)

Minimum fastener pull out strength requirement to attach
Pro-LIFT FFM-600 to backer board is 120 lbs per screw.

Must have a minimum of 8 attach points and 2 attach points for
wall anchor cables at upper frame level.